


Field Replaceable Connectors


M8




M8-4F




M8-4M




M8-3F





M8-3M





M12





M12-5F

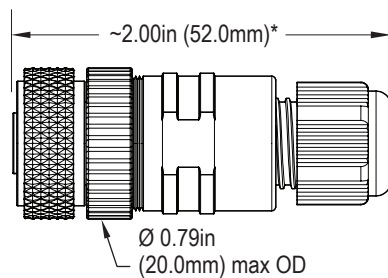


M12-5M

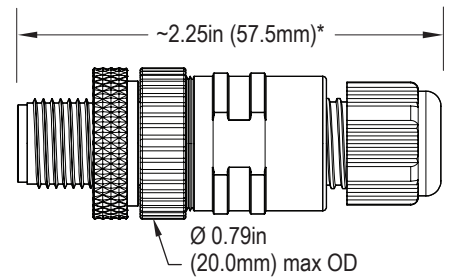

M12-4F

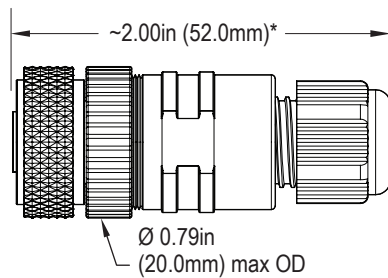

M12-4M

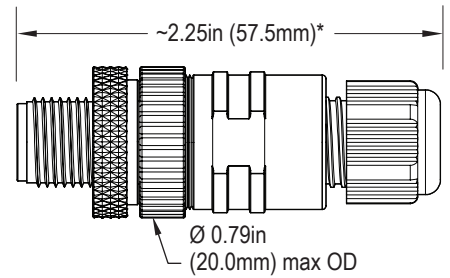

Note: Center hole accepts pin, but is not connected.

Notes:


Not recommended for use on both ends of extension cables. To reduce electrical interference use *Tri-Tronics* molded cables (shield tied to collar).

M8 3-4 Wire, M12 4-5 Wire intended for use on cables with:
22-18 awg wire conductors
outside diameters of Ø 0.118 - 0.256in (3.0 - 6.5mm)

M12 8 Wire intended for use on cables with:
22-18 awg wire conductors.
outside diameters of Ø 0.2 - 0.4in (5.0 - 10.0mm)

*Length is approximate; depending on cable thickness.

M12 Male 8-Pin



M12-8M

